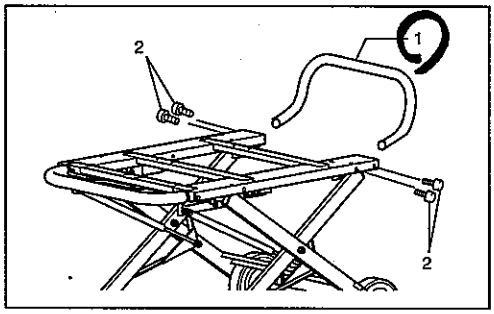

1

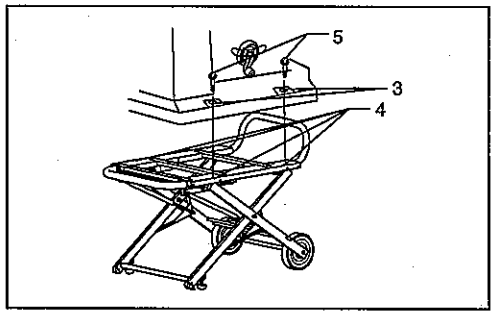

2

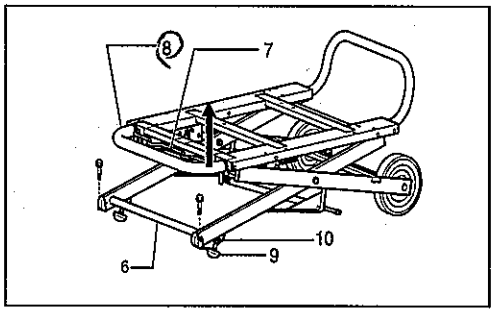

3

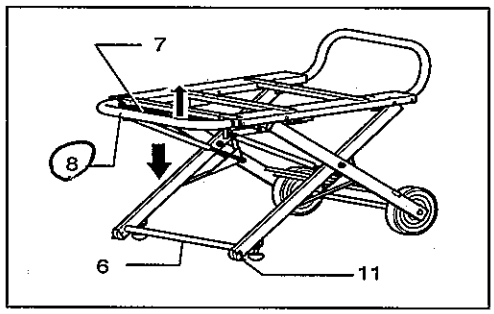

4

ENGLISH

Explanation of general view



1. Table pipe
2. Bolts
3. Holes in your tool base
4. Holes in the stand
5. Bolt
6. Pipe
7. Lever
8. Handle
9. Feet
10. Nuts
11. Fix plates

How to use

⚠ **CAUTION**

- Read and thoroughly understand this manual and the instruction manual of the tool you use before performing the following.
- Before installing a tool on this stand, always switch off and unplug the tool.
- The stand should be bolted in a stable and level surface using the bolts provided on two of four feet.
- Use only with Makita model indicated in the instruction manual.
- Use only the handle to avoid pinched fingers when raising or folding the stand.
- Before operating the tool, secure it to stand using bolts.
- Do not use the stand on uneven or unstable surface.
- Do not climb, sit or stand on the stand.
- When setting up the table saw stand in the upright position or folding it, be sure to securely keep pressing the pipe of table saw stand with your foot until it locks.
- When storing table saw stand, never lean it against the wall or the like lengthwise or sideways.
- Never pull the lever without holding the handle.

Mount the table pipe on the table saw stand securely using the bolts (4 pcs.). **(Fig. 1)**

When securing table saw on the table saw stand, place it on the table saw stand so that the handle of stand is positioned on the left side in the front view of the mounted saw and holes on your tool base match holes in the stand. Then tighten hex bolts (4 positions) securely. **(Fig. 2)**

1. Place the table saw stand on a level location. When setting up the table saw stand in the upright position and grab the handle firmly and stamp the pipe with your foot, pull the lever and raise the handle with your foot positioned on the pipe and with the lever being pulled. When the table stand has reached one of the four positive stops in height, release the lever while holding handle. After making sure that the lever has returned to its original position and the table stand is securely locked, remove your hands from the handle and foot from the pipe. **(Fig. 3)**
2. Adjust the levelness of the table saw stand by rotating the feet (2 pcs.), and then secure the table saw stand by turning the nuts (2 pcs.). **(Fig. 3)**
3. Secure the feet of stand to the stable and level surface using holes in the fix plates with two hex bolts. **(Fig. 4)**
4. To fold the table saw stand, stamp the pipe and raise the handle slightly, pull the lever with the handle slightly elevated and it unlocks. **(Fig. 4)**